


Pigtail set SM 12xLCA, G.657.A1 2m

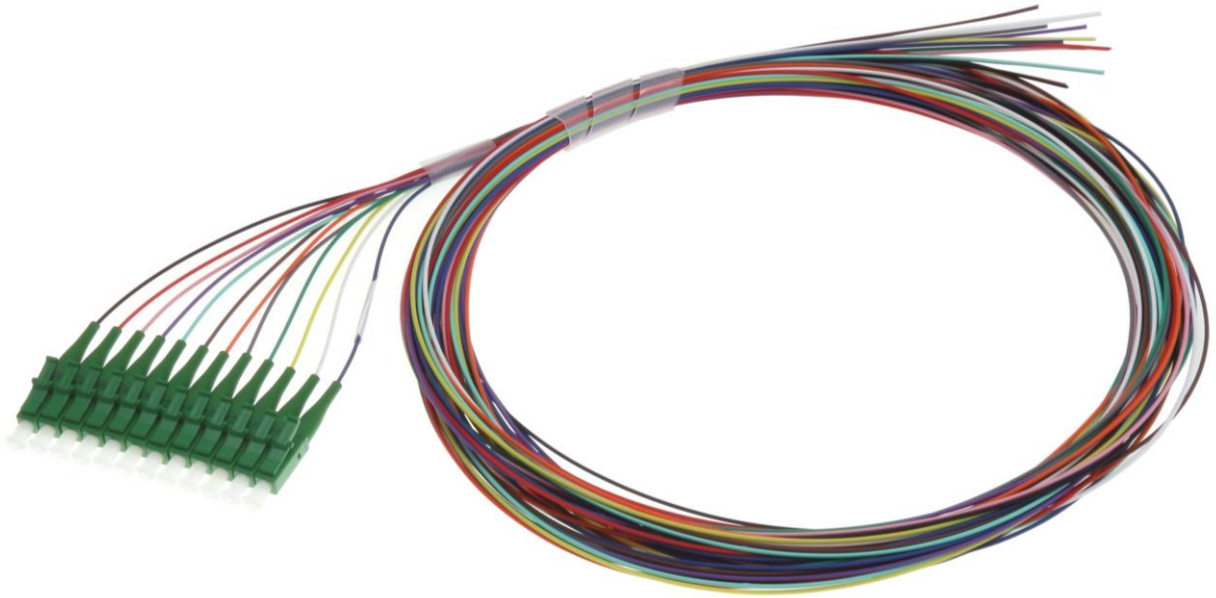

Parameters

Fiber	Corning SMF-28® Ultra optical fiber, G.657.A1	
Secondary coating	900 µm tight buffer, LSZH	
	Color code TIA/EIA 598-C	
Connector type	LC/APC	
Insertion loss	IL ≤ 0.30dB@1550nm	
Insertion loss	RL ≥ 65dB@1550nm	
Temperature Range	Installation	-10 °C to +70 °C
	Operation	-40 °C to +70 °C
	Storage and Transportation	-40 °C to +70 °C